

INSTALLATION

Tools Required:

Flat Screwdriver
Super glue (optional)


Difficulty: **Easy**

Step One – Verify all materials are included.

Be sure your purchase contains the materials you've requested. This should include the key cap itself, the hinge mechanism and a rubber cup (optional) which will be under the key when install is finished.



Step Two – Begin hinge installation.

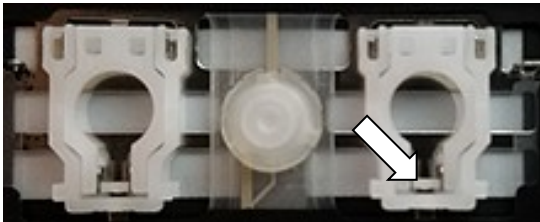


To install the hinge pieces, begin by hooking one end over the protruding metal tab located on the keyboard. A small flat screwdriver or blunt tweezers will assist you in this step. Keep the flattest side of the hinge facing up so it is able to properly receive the key cap.

Repeat this method for each hinge piece.

Step Three – Complete hinge mechanism install.

Press the other ends of the hinge mechanism into the alternate brackets and it will lock into place. Be careful with this step, as forcing the hinge or placing too much stress on the hinge may cause it to break.

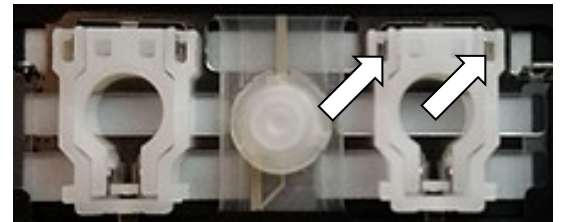

Step Four – Install rubber cup (optional) and press key cap into place.

With the hinges now properly installed, you can place the optional rubber cup if needed. Apply a **small** amount of glue around the OUTER rim of the cup and seat it in the center of the hinge assembly. Sometimes the rubber cup will firmly sit in place by itself, but it is better to use adhesive.

Allow ample drying time before installing the key cap!

Some larger keys will have a metal bar attached to their underside. Install this into the proper brackets on the keyboard, then proceed. Then, simply place the correctly oriented key cap over the hinge mechanism and press down. If the key cap clicks into place, you're all done!



Quik-Fix Laptop Keyboard Keys

www.quikfixlaptopkeys.com